

CERAMAGUARD (100% RH)

www.armstrong.eu



CERAMAGUARD (100% RH)




CERAMAGUARD

BOARD



Prelude XL² / TLX / CR 24 mm / Clean Room Grid 24 mm



600 x 600 x 15 mm
600 x 1200 x 15 mm


607 M
608 M



EN ISO 354 &
EN ISO 11654

α_w	NRC	125	250	500	1000	2000	4000	Hz
0.55(MH)	0.60	0.25	0.30	0.50	0.80	0.85	0.75	α_p

Sound Absorption Class = D

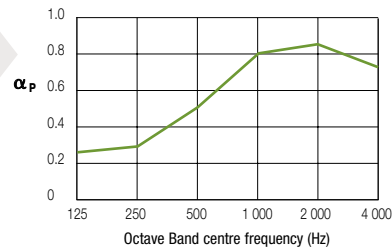

EN 20140-9
& EN 717-1

D_{ncw}	39 dB
------------------------	--------------



EN 13501-1

EEA Euroclass A1

RUS NG to FZ 123



EN 12667
& ISO 8301

$\lambda = 0.067$ W/m K



100 % RH



15 YEAR
guarantee



7 kg/m²
20 kg/m² if wet

Note: Ceramaguard must be installed on Trulok Corrosive Resistant 24 mm (CR 24 mm) grid where humidity regularly exceeds 95% RH. Ceramaguard may need to have main runners at 600 mm centres due to increased weight in high humidity conditions.



Please contact our Armstrong Technical Sales Group for further details.

www.armstrong.eu



Armstrong®