


# FINE FISSURED

# FINE FISSURED



FINE FISSURED	BOARD	TEGULAR	MICROLOOK
	<p>Prelude XL<sup>2</sup>/TLX 24 mm Prelude Sixty<sup>2</sup></p>	<p>Prelude XL<sup>2</sup>/TLX 24 mm Prelude Sixty<sup>2</sup></p>	<p>Prelude XL<sup>2</sup>/TL 15 mm Interlude XL<sup>2</sup> 15 mm</p>
600 x 600 x 15 mm	9121 M*	9122 M	9202 M
625 x 625 x 15 mm	9121 D	9122 D	
600 x 1200 x 15 mm	9120 M		



\*Colours: Board 600 x 600 mm is available in Black (BK).



EN ISO 354 & EN ISO 11654


$\alpha_w$	NRC	125	250	500	1000	2000	4000	Hz
<b>0.60(H)</b>	0.60	0.40	0.40	0.55	0.75	0.75	0.75	$\alpha_p$

**Sound Absorption Class = C**



EN 20140-9 & EN 717-1

<b>D<sub>ncw</sub></b>	<b>34 dB</b>
------------------------	--------------

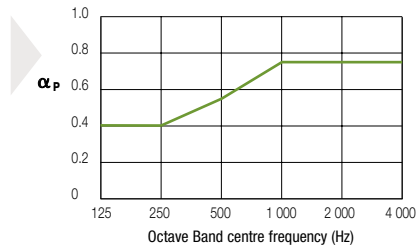

EN 13501-1

EEA	Euroclass A2-s1, d0
EEA	Euroclass A2-s2, d0 (Black)
RUS	KM1 (G1, V1, D1, T1) FZ 123

USA ASTM E84: Flame Spread Index  $\leq$  25; Smoke Developed Index  $\leq$  50  
ASTM E1264: Class A (White)



EN 12667 & ISO 8301

$\lambda = 0.06$  W/m K



95 % RH



**15 YEAR**  
guarantee



$\approx 3.5$  kg/m<sup>2</sup>



Please contact our Armstrong Technical Sales Group for further details.

[www.armstrong.eu](http://www.armstrong.eu)

