

ULTIMA

ULTIMA



ULTIMA


	BOARD	TEGULAR	MICROLOOK BE	VECTOR
	 Prelude XL ² /TLX 24 mm Prelude Sixty ²	 Prelude XL ² /TLX 24 mm Prelude Sixty ²	 Prelude XL ² /TL 15 mm Silhouette XL ² 15 mm Interlude XL ² 15 mm	 Prelude XL ² 24 mm Prelude Sixty ²
500 x 500 x 19 mm			2254 M	
600 x 600 x 19 mm	9536 M	9538 M	9843 M	3320 M
625 x 625 x 19 mm	9536 D	9538 D	9843 D	3320 D
675 x 675 x 19 mm			2743 M	
600 x 1200 x 19 mm	9537 M	2734 M	2735 M	
300 x 1200 x 19 mm			9964 M	



EN ISO 354 & EN ISO 11654

α_w	NRC	125	250	500	1000	2000	4000	Hz	α_p
• Board, Tegular, MicroLook BE									
0.70(H)	0.70	0.55	0.50	0.65	0.80	0.90	0.85		α_p
• Vector									
0.75(H)	0.70	0.50	0.55	0.70	0.85	0.95	0.95		α_p

Sound Absorption Class = C

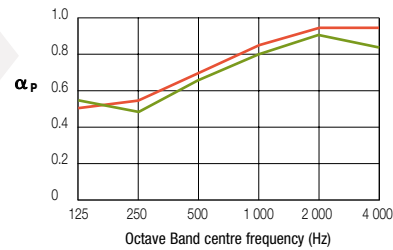

EN ISO 10848-2 & EN ISO 717-1

D_{nfw}
36 dB (Board, Tegular, MicroLook BE)
34 dB (Vector)



EN ISO 140-3 & EN ISO 717-1

R_w
18 dB



EN 13501-1

EEA	Euroclass A2-s1, d0
RUS	G1, V1, D1, T1 to FZ 123

USA	ASTM E84: Flame Spread Index ≤ 25 ; Smoke Developed Index ≤ 50 ASTM E1264: Class A
-----	---



EN 12667 & ISO 8301

$\lambda = 0.052 \text{ W/m K}$



95 % RH

15 YEAR
guarantee



$\approx 5.2 \text{ kg/m}^2$

Please contact our Armstrong Technical Sales Group for further details.

www.armstrong.eu