


ULTIMA OP

ULTIMA OP



ULTIMA OP


	BOARD	TEGULAR	MICROLOOK
	 Prelude XL ² /TLX 24 mm Prelude Sixty ²	 Prelude XL ² /TLX 24 mm Prelude Sixty ²	 Prelude XL ² /TL 15 mm Interlude XL ² 15 mm
600 x 600 x 20 mm	2860 M	2862 M	2863 M
625 x 625 x 20 mm	2860 D	2862 D	2863 D
600 x 1200 x 20 mm	2861 M		



EN ISO 354 & EN ISO 11654

α_w	NRC	125	250	500	1000	2000	4000	Hz
1.00	0.95	0.55	0.85	1.00	0.95	1.00	1.00	α_p

Sound Absorption Class = A

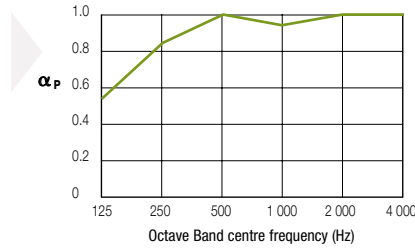

EN ISO 10848-2 & EN ISO 717-1

D_{nfw}	26 dB
------------------------	-------



EN ISO 140-3 & EN ISO 717-1

R_w	10 dB
----------------------	-------



EN 13501-1

EEA	Euroclass A2-s1, d0
RUS	G1, V1, D1, T1 to FZ 123

USA	ASTM E84: Flame Spread Index ≤ 25; Smoke Developed Index ≤ 50
	ASTM E1264: Class A



EN 12667 & ISO 8301

$\lambda = 0.037 \text{ W/m K}$



95 % RH



15 YEAR guarantee



≈ 3.7 kg/m²



Please contact our Armstrong Technical Sales Group for further details.

www.armstrong.eu



Armstrong®