


BIOGUARD PLAIN (ISO 5)




BIOGUARD PLAIN (ISO 5)











≤52%
EN ISO 14021


Recycled Content



87%
EN ISO 7742-2 & 3

Light Reflectance

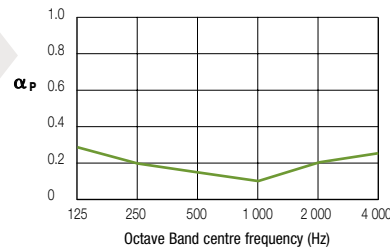
BIOGUARD	BOARD	TEGULAR	MICROLOOK
	 Prelude XL ² /TLX / CR 24 mm Clean Room Grid 24 mm	 Prelude XL ² /TLX 24 mm Clean Room Grid 24 mm	 Prelude XL ² /TL 15 mm Interlude XL ² 15 mm
			
600 x 600 x 15 mm	2221 M	2223 M	2224 M
625 x 625 x 15 mm	2221 D	2223 D	2224 D
600 x 1200 x 15 mm	2222 M		
625 x 1250 x 15 mm	2222 D		




EN ISO 354 & EN ISO 11654

α_w	NRC	125	250	500	1000	2000	4000	Hz
0.15(L)	0.15	0.30	0.20	0.15	0.10	0.20	0.25	α_p


Sound Absorption Class = E





EN ISO 10848-2 / EN 20140-9 & EN ISO 717-1

D_{nfw}	34 dB
------------------------	--------------



EN ISO 140-3 & EN ISO 717-1

R_w	19 dB
----------------------	--------------



EN 13501-1

EEA	Euroclass A2-s1, d0	RUS	G1, V2, D1, T1 to FZ 123
-----	---------------------	-----	--------------------------



EN 12667 & ISO 8301

$\lambda = 0.06 \text{ W/m K}$



ISO 14644-1

ISO 5



95 % RH



15YEAR guarantee



3.6 kg/m²

┌
└ Please contact our Armstrong Technical Sales Group for further details.
www.armstrong.eu



Printed in E.C. on chlorine free paper from sustainable resources.
 Armstrong Building Products P.O.S. Besançon B 784 131 575
 PC 1305